Installation instructions for contractors



Mixer extension kit

Part no. 7441998 Mixer motor

Part no. 7450657

Safety instructions



Please follow these safety instructions closely to prevent accidents and material losses.

Installation, initial start-up, inspection, maintenance and repairs must only be carried out by a competent person (heating engineer/installation contractor).

Before working on the equipment/heating system, isolate the power supply (e.g. by removing a separate mains fuse or by means of a mains isolator) and safeguard against unauthorised reconnection.

When using gas as fuel, also close the main gas shut-off valve and safeguard against unauthorised reopening.

Repairing components which fulfil a safety function can compromise the safe operation of your heating system. For replacements, use only original spare parts supplied or approved by Viessmann.

Information

Disposal of packaging

Please dispose of packaging waste in line with statutory regulations.

Information (cont.)

Symbols

Sym- bol	Meaning
	Reference to other document containing further information
1.	Step in a diagram: The numbers correspond to the order in which the steps are carried out.
!	Warning of material losses and environmental pollution
4	Live electrical area
	Pay particular attention.
)	■ Component must audibly click into place. or ■ Acoustic signal
*	■ Fit new component. or ■ In conjunction with a tool: Clean the surface.
	Dispose of component correctly.
X	Dispose of component at a suitable collection point. Do not dispose of component in domestic waste.


Information (cont.)

System examples

For available system examples, see www.viessmann-schemes.com

Installing an extension kit

Fitting the mixer motor to the mixer

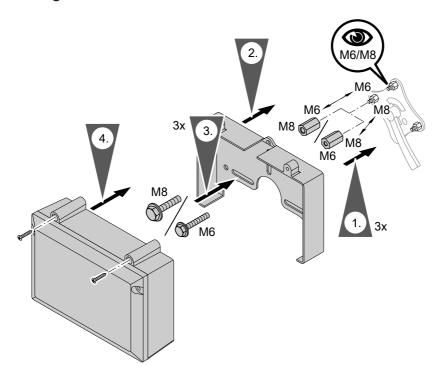


Installing an extension kit (cont.)

Fitting the flow temperature sensor

- Fit the flow temperature sensor immediately downstream of the heating circuit pump in the direction of flow at the heating flow pipe
- When using plastic pipes, fit the sensor on any metal intermediate piece
- Clean the flow pipe down to bare metal
- Heat conducting paste is not required
- Never thermally insulate the sensor

Installing an extension kit (cont.)

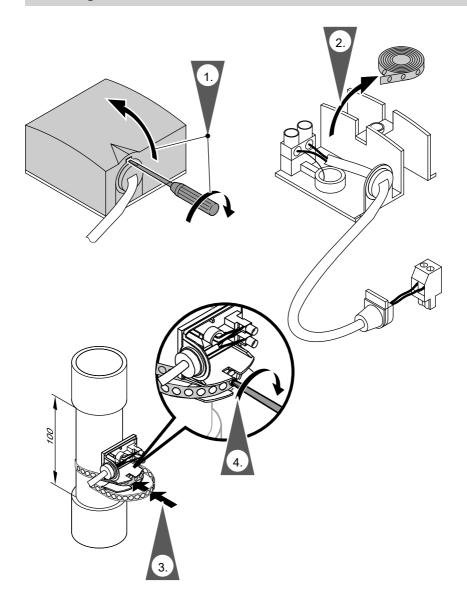

Connecting the extension kit to the control unit

Connecting the flow temperature sensor

Push sensor plug 2 into the corresponding socket of the control unit.



Installation and service instructions of the relevant control unit


Connecting the mixer motor

Push connecting cable plug [52] into the corresponding socket of the control unit.



Installation and service instructions for the relevant control unit

Connecting the mixer motor as a replacement



- **1.** Undo the 3-core cable from the mixer motor to be replaced.
- Connect the 3-core cable to the plug of the new mixer motor in accordance with the diagram.




Installation and service instructions for the relevant control unit

- A To the control unit
- B Plug within the mixer motor



Mixer open Mixer closed

Changing the rotational direction (if required)



- **1.** Switch OFF the power supply at the control unit.
- 2. Undo the casing cover.
- **3.** Disconnect 3-pin plug (A) in the mixer motor.
- **4.** Insert the 3-pin plug in the mixer motor rotated through 180°.
- 5. Check the rotational direction.

Specification

Mixer motor

Rated voltage Rated frequency Power consumption Protection class IP rating

Runtime for 90° <

Permissible ambient temperature

- During operation
- During storage and transport


Flow temperature sensor

Sensor type IP rating

Permissible ambient temperature

- During operation
- During storage and transport

Curve



230 V~

50 Hz

4 W

Ш

IP 42 to EN 60 529; ensure through de-

sign/installation

120 s

0 to +40 °C

-20 to +65 °C

NTC 10 kΩ, at 25 °C

IP 32 to EN 60 529; ensure through design/installation

0 to + 120 °C

-20 to +70 °C

Declaration of Conformity

We, Viessmann Werke GmbH & Co. KG, D-35107 Allendorf, declare as sole responsible body that the named product complies with the European directives and supplementary national requirements in terms of its design and operational characteristics. Using the serial number, the full Declaration of Conformity can be found on the following website:

www.viessmann.co.uk/eu-conformity







Viessmann Werke GmbH & Co. KG D-35107 Allendorf Telephone: +49 6452 70-0

Fax: +49 6452 70-2780 www.viessmann.com

Hortonwood 30, Telford Shropshire, TF1 7YP, GB Telephone: +44 1952 675000
Fax: +44 1952 675040
E-mail: info-uk@viessmann.com

Viessmann Limited