



AIR/WATER HEAT PUMP

Space-saving monobloc heat pump for outdoor installation:

VITOCAL 100-A



Heat pumps for outdoor installation: Maximum efficiency with minimum energy consumption



Vitocal 100-A 6-8 kW



Vitocal 100-A 10-12 kW



Vitocal 100-A 14-16 kW

The new Vitocal 100-A air/water heat pumps cover most applications in new build and modernisation projects. With outputs between 6 and 16 kW, the specifications for convenient heat supply and domestic hot water preparation can be met.

The units, which are designed exclusively for outdoor installation, contain all the components and are quick and easy to install. By using the environmentally friendly refrigerant R32, the installer does not need a refrigerant certificate.









Eco-friendly refrigerant R32

Gold protects against corrosion and ensures long service life

In comparison to conventional heat exchangers, the Vitocal 100-A has a gold-plated exchanger. Long-term tests with saline liquids have shown that no visible corrosion has occurred. This guarantees the user a long service life.



- 1 Fan
- 2 Evaporator
- 3 Control unit
- 4 Circulation pump
- 5 Condenser
- 6 Controller
- 7 Compressor

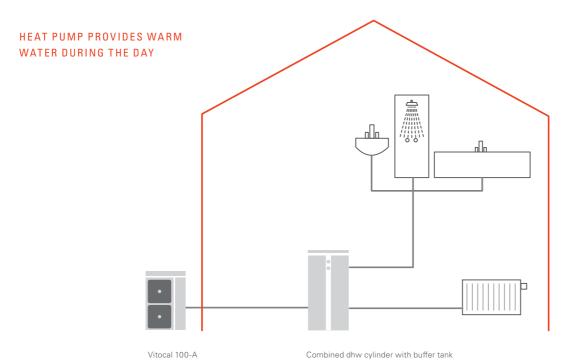

Typical installation showing the Vitocal 100-A heat pump with a combi cylinder (buffer and DHW) heating a house and providing hot water.

Low-cost space saving buffer solutions

The Vitocal 100-A offers different low-cost solutions combining an external mounted buffer store, which is ideal for space saving applications, with a separate DHW cylinder. Alternatively, a combi buffer is available comprising a buffer and DHW cylinder in one.

Comfortable wireless control with touchscreen and plain text display

The Vitocal 100-A can be operated directly on the appliance via the built-in control unit. Standard wired and wireless heating controls can be combined with the Vitocal 100-A for convenient operation.

Viessmann Touch and Touch-Multi controls are available for extended applications.

ADVANTAGES FOR USERS

- + Space-saving solution for outdoor installation
- + Three power ratings for most applications
- + Recommended for new build and modernisation
- + All components integrated in one device
- + Energy-saving power regulation
- + Installer does not require a refrigerant certificate
- + Easy and quick to install
- + Environmentally friendly refrigerant R32
- + Corrosion-resistant gold-plated heat exchanger
- + Practical remote control without special software
- + 5 year manufacturers warranty as standard, option to increase to 7 years (chargeable)



Simple operation with plain text display directly on the heat pump



Vitocal 100-A Touch control (Note this is not wireless)



Vitocal 100-A Touch-Multi for extended applications



Viessmann Limited Hortonwood 30, Telford Shropshire, TF1 7YP Tel: 01952 675000

Fax: 01952 675040 www.viessmann.co.uk

Air/Water heat pump

VITOCAL 100-A


Vitocal 100-A, Type AWO-(M)-AF 101.A		06	08	10	12	14	16
Output (EN14511 A7/W35)	kW	6.08	7.81	10.1	11.8	14.1	16.3
COP		4.51	4.38	4.43	4.32	4.85	4.67
Output control	kW	4.0-7.0	4.0-9.0	5.3-11.6	5.3-13.6	7.5-15.2	7.4-17.6
AC voltage / frequency	V / Hz	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230/50
Maximum flow temperature	degs C	60	60	60	60	60	60
Sound power level	dB(A)	64	64	64	65	68	68
Dimensions							
Depth	mm	377	377	455	455	448	448
Width	mm	924	924	1047	1047	1044	1044
Height	mm	828	828	936	936	1409	1409
Weight	kg	72.4	72.4	104.5	104.5	124.5	129.5
Refrigerant		R32	R32	R32	R32	R32	R32
Energy efficiency class (LT)		A+++	A+++	A+++	A+++	A+++	A+++





PRODUCT FEATURES

- + Air / water heat pump with electric drive for outdoor installation
- + Low operating costs due to high Coefficient of Performance to EN 14511
- + Maximum flow temperature: to 60 °C at -8 °C outside temperature
- + Energy efficiency class: A+++





Your trade partner

Viessmann Direct Unit 8 The Centurion Centre Castlegate Business Park Old Sarum Salisbury SP4 6QX

+44 (0)1722 417875 sales@viessmanndirect.co.uk viessmanndirect.co.uk

9451 458 GB 03/2020

Copyright Viessmann
Duplication and alternative use
only with prior written consent.
Subject to technical modifications.